


# SERIES 403 STOREFRONT FRAMING



## Shear Block • Screw Spline

This economical 2" X 4-1/2" flush glaze system is available in both shear block and screw spline fabrication methods. Series 403 Storefront can accommodate all standard 1 3/4" Entrances as well as WV410 vents. This series is thermally broken, enhancing energy savings potential. Vertical mullions will accept steel reinforcement to enhance structural performance.

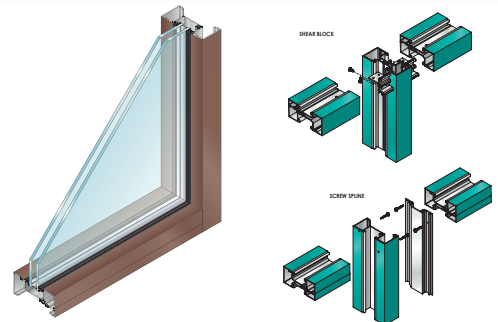

<b>STRUCTURAL LOAD</b> <small>(ASTM E330)</small> VISIT <a href="http://EFCOCORP.COM">EFCOCORP.COM</a>		<b>WATER RESISTANCE</b> <small>(ASTM E547 &amp; E331)</small> 12 PSF	
<b>AIR INFILTRATION</b> <small>(ASTM E283)</small> 0.06 CFM/FT <sup>2</sup>		<b>CRF</b> <small>(AAMA 1503)</small> SCREW SPLINE 57	
<b>U-FACTOR*</b> <small>(ANSI/NFRC 100/200)</small> SCREW SPLINE 0.34-0.55		<b>OITC*</b> <small>(ASTM E90 &amp; E413)</small> SCREW SPLINE 30	
<b>STC*</b> <small>(ASTM E90 &amp; E413)</small> SCREW SPLINE 34			

## STANDARD FEATURES

- Thermally broken frames
- Screw spline construction
- Shear block construction
- 2-way corner mullions (90° & 135°)
- 3-way corner mullions (T-mullions)
- 0° - 15° and 15° - 30° variable mullions
- Accommodates up to 1-1/8" glazing
- Uniform glazing gasket is used for exterior and interior
- Various height intermediate horizontals and sills
- Accessory line of perimeter anchors, pocket fillers, door adaptors, etc.
- Anodized or painted finished available

\* Performance dependent on glass selection. Please contact your EFCO sales rep for project specific performance.