









# SYSTEM 5500 CURTAIN WALL

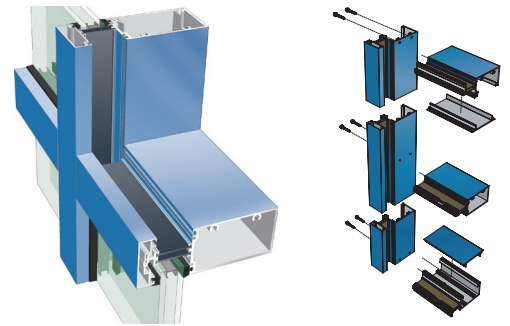

Outside Glazed • Inside Glazed • 2 or 4-sided Structural Silicone Glazed  
 The 5500 2-1/4" curtain wall system is designed to meet the most demanding performance specifications. System 5500 utilizes the E-Strut thermal isolator, providing outstanding thermal properties and a total composite shape for enhanced structural performance. System 5500 offers dual finish capability to meet any design finish specification.



<p><b>STRUCTURAL LOAD</b> (ASTM E330)</p> <p>→ </p> <p>VISIT <a href="http://EFCOCORP.COM">EFCOCORP.COM</a></p>	<p><b>WATER RESISTANCE</b> (ASTM E547 &amp; E331)</p> <p></p> <p>CAPTURED: 12 PSF</p>
<p><b>AIR INFILTRATION</b> (ASTM E283)</p> <p></p> <p>CAPTURED: &lt;0.06 CFM/SF</p>	<p><b>CRF</b> (AAMA 1503)</p> <p></p> <p>CAPTURED: 77 SSG: 72</p>
<p><b>U-FACTOR*</b> (ANSI/NFRC 100/200)</p> <p></p> <p>CAPTURED: 0.27 - 0.49 SSG: 0.29 - 0.52</p>	<p><b>OITC*</b> (ASTM E90 &amp; E413)</p> <p></p> <p>CAPTURED: 38</p>
<p><b>STC*</b> (ASTM E90 &amp; E413)</p> <p></p> <p>CAPTURED: 47</p>	

## STANDARD FEATURES

- E-Strut thermal isolator
- Various mullion depths available
- Screw spline construction
- Temporary glazing clips not required
- Composite mullion
- Integral door adaptors
- Accommodates up to 1" glazing
- Splices and internal steel reinforcement
- Accessory line of perimeter anchors, pocket fillers, door adaptors, etc.
- Optional corner mullions
- Concealed vents
- Wide variety of snap-on face covers
- Anodized and painted finishes available

\* Performance dependent on glass selection. Please contact your EFCO sales rep for project specific performance.